


P. C. B LAYOUT

Specifications:
 Current Rating: 0.75 Amp
 Contact resistance: 20m Ohm Max
 Insulator resistance: 1000M ohm min.
 Withstanding Voltage: 500V AC/Minute
 Operating Temperature Range: -40° ~ +105° C
 Material And Finish
 Insulator: Polyester, (PBT UL94V-0)
 Insulator Color: Black
 Contact: Brass
 Contact Plated: See Contact Plated Tab.

Ordering information

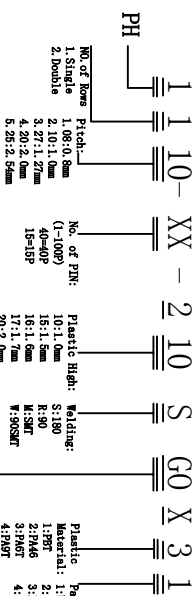

NO. of Rows Pitches:
 1. Single 1.08/0.8mm
 2. Double 2.10/1.6mm
 3. 27:1.27mm
 4. 20:2.0mm
 5. 25:2.54mm

No. of PIN: (1-10P)
 40=40P
 15=15P

Plastic Height: S180
 Material: 1:ibag
 R:90
 W:50T
 M:50T
 25:2.54mm
 5:1.27


Gold Plated	Solder Plated	Sn/Pb	100%	100%	100%	100%	100%
00	load 100"	11	load 100"	12	Th. 100"	13	Th. 150"
01	load 100"	11	load 100"	12	Th. 200"	13	Th. 150"
02	load 200"	12	load 200"	13	Th. 100"	14	Th. 100"
03	load 200"	13	load 200"	14	Th. 100"	15	Th. 100"
04	load 200"	14	load 200"	15	Th. 100"	16	Th. 100"
05	load 100"	15	load 100"	16	Th. 100"	17	Th. 100"
06	load 100"	16	load 100"	17	Th. 100"	18	Th. 100"
07	load 200"	17	load 200"	18	Th. 100"	19	Th. 100"







品名 (TITLE): PH1.0*1.0*2 1*NP 180° DIP 系列图

A4

线性 (LINER)		角度 (ANGLES)		审核 (CHECK)		料号 (PART NO.)		图号 (DWG NO.)		单位 (UNIT)		页次 (SHEET)	
X ± --	X' ± 1'	X ± --	X' ± 1'	核准 (APPROVED)	日期 (DATE)	核准 (APPROVED)	日期 (DATE)	核准 (APPROVED)	日期 (DATE)	核准 (APPROVED)	日期 (DATE)	核准 (APPROVED)	日期 (DATE)
.X ± 0.20	.X' ± --	.XX ± 0.15	.XX' ± --	.XXX ± 0.10	.XXX' ± --	.XXX ± 0.10	.XXX' ± --	.XXX ± 0.10	.XXX' ± --	.XXX ± 0.10	.XXX' ± --	.XXX ± 0.10	.XXX' ± --
第三视角投影 (THIRD ANGLE PROJECTION)		第三视角投影 (THIRD ANGLE PROJECTION)		第三视角投影 (THIRD ANGLE PROJECTION)		第三视角投影 (THIRD ANGLE PROJECTION)		第三视角投影 (THIRD ANGLE PROJECTION)		第三视角投影 (THIRD ANGLE PROJECTION)		第三视角投影 (THIRD ANGLE PROJECTION)	

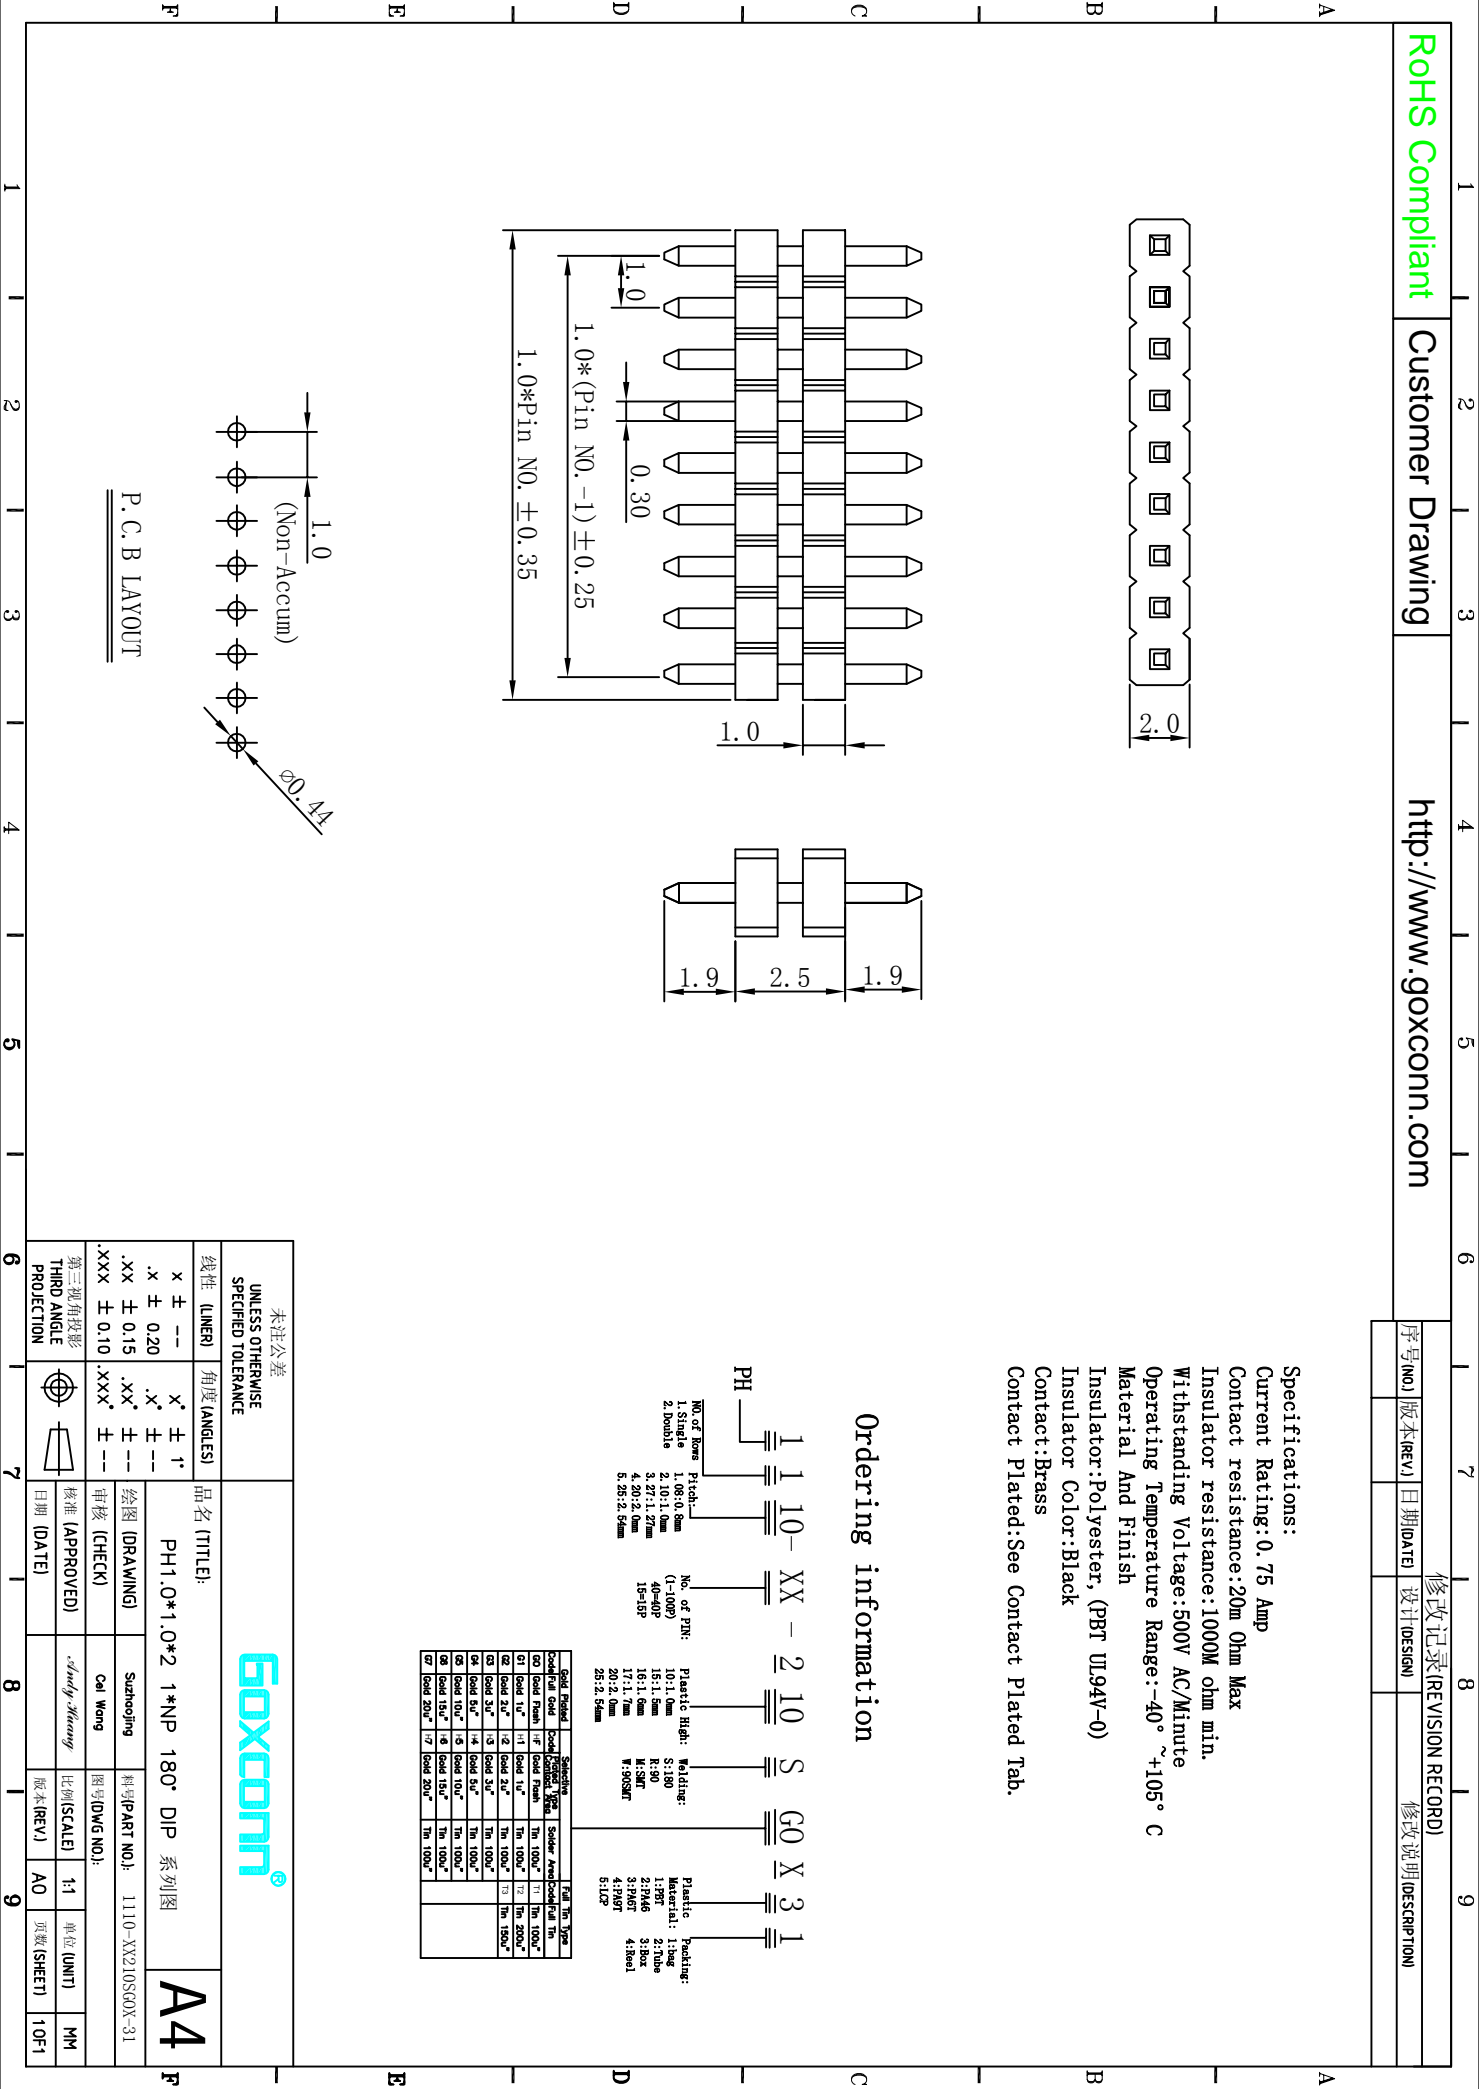


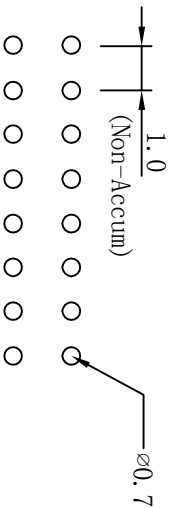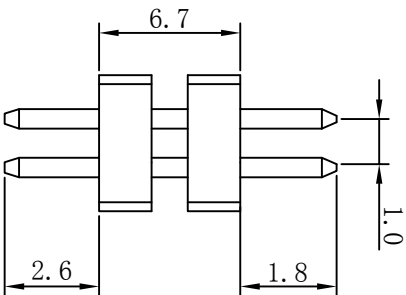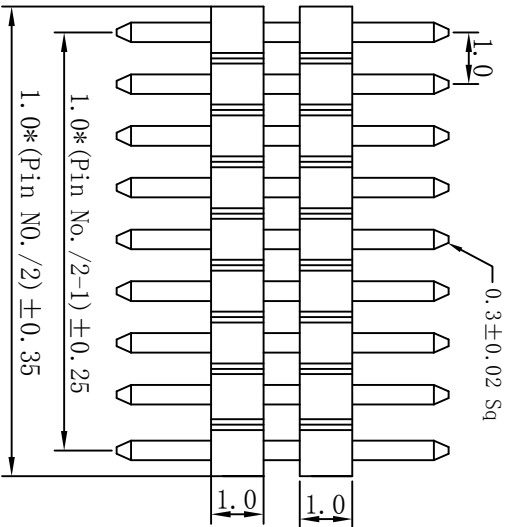

P.C.B LAYOUT

Specifications:
 Current Rating: 0.75 Amp
 Contact resistance: 20m Ohm Max
 Insulator resistance: 1000M ohm min.
 Withstanding Voltage: 500V AC/Minute
 Operating Temperature Range: -40° ~ +105° C
 Material And Finish
 Insulator: Polyester, (PBT UL94V-0)
 Insulator Color: Black
 Contact: Brass
 Contact Plated: See Contact Plated Tab.

Ordering information

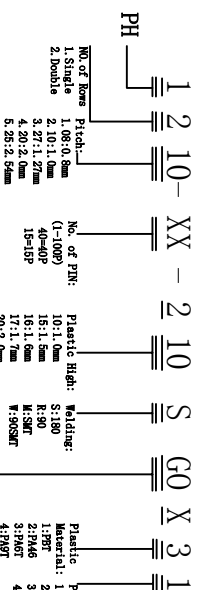

NO. of Rows Pitch:
 1. Single 1.08±0.08mm
 2. Double 2.10±1.0mm
 40=40P 3.27±1.27mm
 15=15P 4.20±2.0mm
 5=25=2.54mm

No. of PIN: 10:1.0mm (1-100P)
 15:1.5mm (40=40P)
 16:1.6mm (15=15P)
 17:1.7mm (25=25P)
 25:2.5mm

Welding: S180
 Material: 1:ing
 2:FR3
 3:PA6T
 4:PA9T
 5:12P
 Plastic Plating: 2:10ub
 3:20ub
 4:180ub
 5:12P

Code	Material	Code	Material	Code	Material
00	load 100"	11	load 100"	11	Th. 100"
01	load 10"	12	load 20"	12	Th. 200"
02	load 20"	13	load 30"	13	Th. 150"
03	load 30"	14	load 40"	14	Th. 100"
04	load 40"	15	load 50"	15	Th. 100"
05	load 100"	16	load 100"	16	Th. 100"
06	load 100"	17	load 200"	17	Th. 100"

未注公差 UNLESS OTHERWISE SPECIFIED TOLERANCE		线性 (LINER)		角度 (ANGLES)	
x ± --	x' ± 1'	x ± 0.20	x' ± --	x ± 0.15	x' ± --
.xxx ± 0.10	.xxx' ± --	.xxx ± 0.15	.xxx' ± --	.xxx ± 0.10	.xxx' ± --

第三视角投影 THIRD ANGLE PROJECTION	审核 (CHECK)	日期 (DATE)	品名 (TITLE): PH1.0*1.0*2 2*NP 180° DIP 系列图
核准 (APPROVED)	日期 (DATE)	图号 (DWG NO.): 1210-XXX210S00X-31	料号 (PART NO.): 1210-XXX210S00X-31
Cal Wang	日期 (DATE)	图号 (DWG NO.):	料号 (PART NO.):
核准 (APPROVED)	日期 (DATE)	图号 (DWG NO.):	料号 (PART NO.):
核准 (APPROVED)	日期 (DATE)	图号 (DWG NO.):	料号 (PART NO.):

第三视角投影 THIRD ANGLE PROJECTION	审核 (CHECK)	日期 (DATE)	品名 (TITLE): PH1.0*1.0*2 2*NP 180° DIP 系列图
核准 (APPROVED)	日期 (DATE)	图号 (DWG NO.): 1210-XXX210S00X-31	料号 (PART NO.): 1210-XXX210S00X-31
Cal Wang	日期 (DATE)	图号 (DWG NO.):	料号 (PART NO.):
核准 (APPROVED)	日期 (DATE)	图号 (DWG NO.):	料号 (PART NO.):
核准 (APPROVED)	日期 (DATE)	图号 (DWG NO.):	料号 (PART NO.):

A4

