

RoHS Compliant




Customer Drawing

<http://www.goxconn.com>


序号(MOI) 版本(REV.) 日期(DATE) 设计(DESIGN)

修改记录(REVISION RECORD)

修改说明(DESCRIPTION)

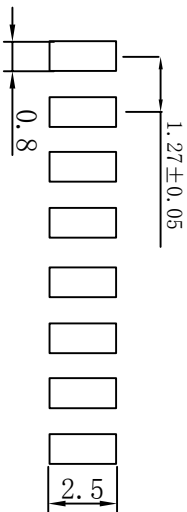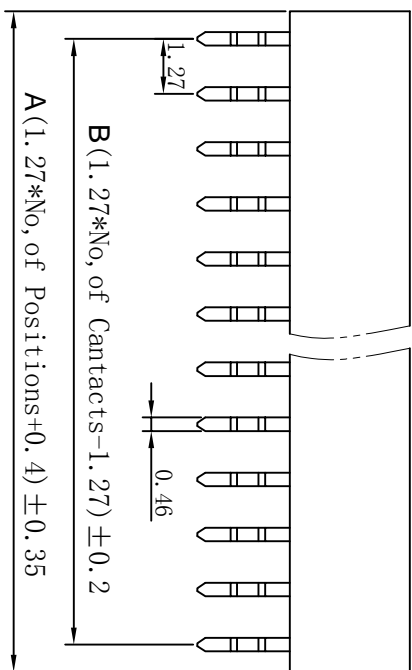


RECOMMENDED P.C.B LAYOUT



Specifications:
 Current Rating: 1.0 Amp
 Contact resistance: 20MΩ Max
 Insulator resistance: 1000MΩ Min.
 Withstanding Voltage: 500V AC
 Operating Temperature Range: -40° ~ +105° C
 Material And Finish
 Insulator: Polyester, (PA6T UL94V-0)
 Insulator Color: Black
 Contact: Brass
 Contact Plated: See Contact Plated Tab.

Ordering information

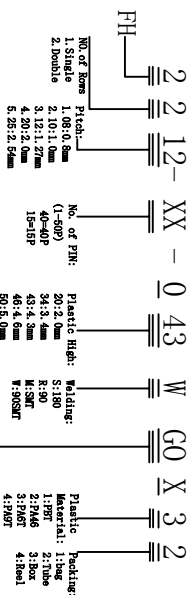

Gold Plated	Gold Plated	Substrate	Part No. Type
Plating	Plating	Material	Material
020 Gold 20μ	020 Gold 20μ	020 Gold 20μ	020 Gold 20μ
025 Gold 25μ	025 Gold 25μ	025 Gold 25μ	025 Gold 25μ
030 Gold 30μ	030 Gold 30μ	030 Gold 30μ	030 Gold 30μ
035 Gold 35μ	035 Gold 35μ	035 Gold 35μ	035 Gold 35μ
040 Gold 40μ	040 Gold 40μ	040 Gold 40μ	040 Gold 40μ
045 Gold 45μ	045 Gold 45μ	045 Gold 45μ	045 Gold 45μ
050 Gold 50μ	050 Gold 50μ	050 Gold 50μ	050 Gold 50μ
055 Gold 55μ	055 Gold 55μ	055 Gold 55μ	055 Gold 55μ
060 Gold 60μ	060 Gold 60μ	060 Gold 60μ	060 Gold 60μ
065 Gold 65μ	065 Gold 65μ	065 Gold 65μ	065 Gold 65μ
070 Gold 70μ	070 Gold 70μ	070 Gold 70μ	070 Gold 70μ
075 Gold 75μ	075 Gold 75μ	075 Gold 75μ	075 Gold 75μ
080 Gold 80μ	080 Gold 80μ	080 Gold 80μ	080 Gold 80μ
085 Gold 85μ	085 Gold 85μ	085 Gold 85μ	085 Gold 85μ
090 Gold 90μ	090 Gold 90μ	090 Gold 90μ	090 Gold 90μ
095 Gold 95μ	095 Gold 95μ	095 Gold 95μ	095 Gold 95μ
100 Gold 100μ	100 Gold 100μ	100 Gold 100μ	100 Gold 100μ

未注公差 UNLESS OTHERWISE SPECIFIED TOLERANCE		品名 (TITLE):		FH1.27*4.3 1*NP SMT/90° 系列图		A4	
线性 (LINER)	角度 (ANGLES)	绘图 (DRAWING)	审核 (CHECK)	批准 (APPROVED)	日期 (DATE)	图号 (SCALE)	单位 (UNIT)
x ± --	x' ± ±	020	020	020	020	1:1	MM
.xx ± 0.20	.x' ± ±	015	015	015	015	AO	MM
.xxx ± 0.15	.xx' ± ±						
.xxx ± 0.10	.xxx' ± ±						
第三类角投影 THIRD ANGLE PROJECTION							



A4