RoHS Compliant	Customer Drawing	http://www.goxconn.com

修改记录(REVISION RECORD)				
序号(NO.)	版本(REV.)	日期(DATE)	设计(DESIGN)	修改说明(DESCRIPTION)

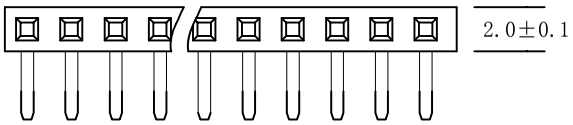

Specifications:
Current Rating:1.5 Amp
Contact resistance:20MΩ Max
Insulator resistance:1000MΩ Min.
Withstanding Voltage:500V AC
Operating Temperature Range:-40° ~+105° C
Material And Finish
Insulator:Polyester,(PBT UL94V-0)
Insulator Color:Black
Contact:Brass
Contact Plated:See Contact Plated Tab.

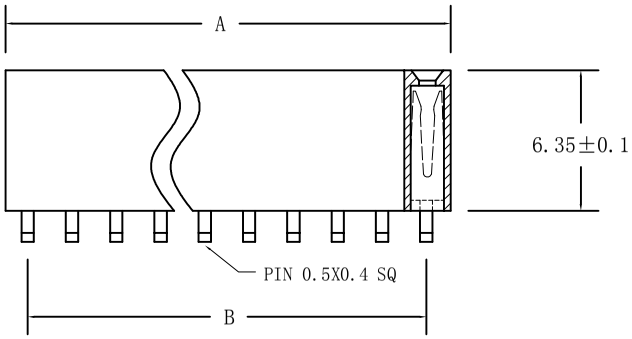

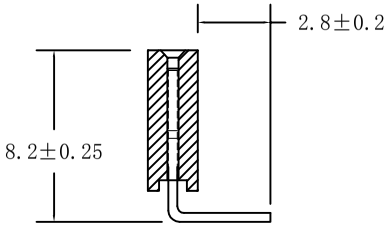

Position Dimension	2 Thru 40
A±0.30	2.00 * No. of Positions+0.40
B±0.20	2.00 * No. of Contacts-2.00

Ordering information

2 1 20- XX - 0 63 R G0 X 3 2

FH

NO. of Rows
1. Single
2. Double

Pitch:-
1. 08:0.8mm
2. 10:1.0mm
3. 12:1.27mm
4. 20:2.0mm
5. 25:2.54mm

No. of PIN:
(1-40P)
40=40P
15=15P

Plastic High:
20:2.0mm
34:3.4mm
43:4.3mm
46:4.6mm
50:5.0mm
63:6.35mm
85:8.5mm

Welding:
S:180
R:90
M:SMT
W:90SMT

Plastic Material:
1:PBT
2:PA46
3:PA6T
4:PA9T
5:LCP

Packing:
1:bag
2:Tube
3:Box
4:Reel

Gold Plated		Selective				Full Tin Type	
Code	Full Gold	Code	Plated Type Contact Area	Solder Area	Code	Full Tin	
G0	Gold Flash	HF	Gold Flash	Tin 100u"	T1	Tin 100u"	
G1	Gold 1u"	H1	Gold 1u"	Tin 100u"	T2	Tin 200u"	
G2	Gold 2u"	H2	Gold 2u"	Tin 100u"	T3	Tin 150u"	
G3	Gold 3u"	H3	Gold 3u"	Tin 100u"			
G4	Gold 5u"	H4	Gold 5u"	Tin 100u"			
G5	Gold 10u"	H5	Gold 10u"	Tin 100u"			
G6	Gold 15u"	H6	Gold 15u"	Tin 100u"			
G7	Gold 20u"	H7	Gold 20u"	Tin 100u"			



PCB LAYOUL

未注公差 UNLESS OTHERWISE SPECIFIED TOLERANCE		Goxconn®				
线性 (LINER)	角度(ANGLES)	品名 (TITLE): FH2.0*6.35 1*NP 90° 系列图				A4
x ± --	x° ± 1°					
.x ± 0.20	.x° ± --					
.xx ± 0.15	.xx° ± --	绘图 (DRAWING)	Suzhaojing	料号(PART NO.):	2120-XX063RG0X-32	
.xxx ± 0.10	.xxx° ± --	审核 (CHECK)	Cel Wang	图号(DWG NO.):		
第三视角投影 THIRD ANGLE PROJECTION		核准 (APPROVED)	Andy Huang	比例(SCALE) 1:1	单位 (UNIT)	MM
		日期 (DATE)		版本(REV.) A0	页数(SHEET)	1 OF 1

RoHS Compliant	Customer Drawing	http://www.goxconn.com

修改记录(REVISION RECORD)				
序号(NO.)	版本(REV.)	日期(DATE)	设计(DESIGN)	修改说明(DESCRIPTION)

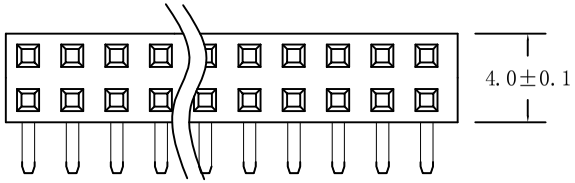

Specifications:
Current Rating:1.5 Amp
Contact resistance:20MΩ Max
Insulator resistance:1000MΩ Min.
Withstanding Voltage:500V AC
Operating Temperature Range:-40° ~+105° C
Material And Finish
Insulator:Polyester,(PBT UL94V-0)
Insulator Color:Black
Contact:Brass
Contact Plated:See Contact Plated Tab.

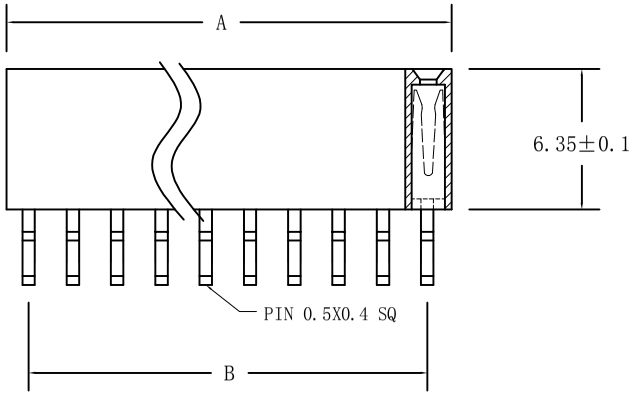

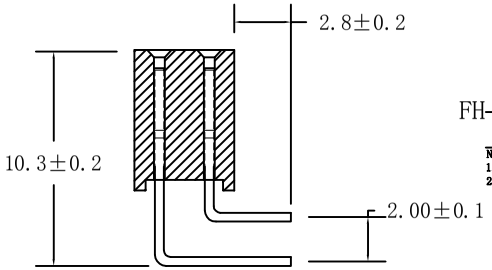

Ordering information

2 2 20- XX - 0 63 R G0 X 3 2

FH

NO. of Rows
1. Single
2. Double

Pitch:
1. 08:0.8mm
2. 10:1.0mm
3. 12:1.27mm
4. 20:2.0mm
5. 25:2.54mm

No. of PIN:
(2-80P)
40=40P
15=15P

Plastic High:
20:2.0mm
34:3.4mm
43:4.3mm
46:4.6mm
50:5.0mm
63:6.35mm
85:8.5mm

Welding:
S:180
R:90
M:SMT
W:90SMT

Plastic Material:
1:PBT
2:PA46
3:PA6T
4:PA9T
5:LCP

Packing:
1:bag
2:Tube
3:Box
4:Reel

Gold Plated		Selective			Full Tin Type	
Code	Full Gold	Code	Plated Type Contact Area	Solder Area	Code	Full Tin
G0	Gold Flash	HF	Gold Flash	Tin 100u"	T1	Tin 100u"
G1	Gold 1u"	H1	Gold 1u"	Tin 100u"	T2	Tin 200u"
G2	Gold 2u"	H2	Gold 2u"	Tin 100u"	T3	Tin 150u"
G3	Gold 3u"	H3	Gold 3u"	Tin 100u"		
G4	Gold 5u"	H4	Gold 5u"	Tin 100u"		
G5	Gold 10u"	H5	Gold 10u"	Tin 100u"		
G6	Gold 15u"	H6	Gold 15u"	Tin 100u"		
G7	Gold 20u"	H7	Gold 20u"	Tin 100u"		

Position Dimension	2 Thru 40
A±0.30	2.00 * No. of Positions+0.40
B±0.20	2.00 * No. of Contacts-2.00

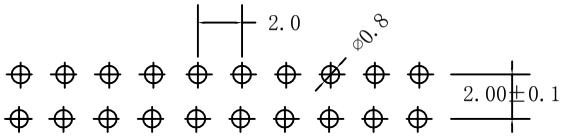

PCB LAYOUL

未注公差 UNLESS OTHERWISE SPECIFIED TOLERANCE		Goxconn®				
线性 (LINER)	角度(ANGLES)	品名 (TITLE): FH2.0*6.35 2*NP 90° 系列图				A4
x ± --	x° ± 1°					
.x ± 0.20	.x° ± --					
.xx ± 0.15	.xx° ± --	绘图 (DRAWING)	Suzhaojing	料号(PART NO.):	2220-XX063RG0X-32	
.xxx ± 0.10	.xxx° ± --	审核 (CHECK)	Cel Wang	图号(DWG NO.):		
第三视角投影 THIRD ANGLE PROJECTION		核准 (APPROVED)	Andy Huang	比例(SCALE) 1:1	单位 (UNIT)	MM
		日期 (DATE)		版本(REV.) A0	页数(SHEET)	1 OF 1