


Specifications:  
 Current Rating: 1.5 Amp  
 Contact resistance: 20MΩ Max  
 Insulator resistance: 1000MΩ Min.  
 Withstanding Voltage: 500V AC  
 Operating Temperature Range: -40° ~ +105° C  
 Material And Finish  
 Insulator: Polyester, (PA6T UL94V-0)  
 Insulator Color: Black  
 Contact: Brass  
 Contact Plated: See Contact Plated Tab.

Ordering information

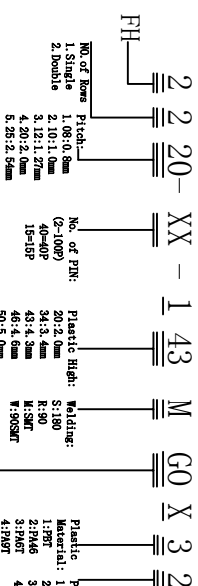

Code	Material	Finish	Plating	Temp. Range
G0	load 100"	11	load 100"	Th. 100"
G1	load 100"	12	load 100"	Th. 200"
G2	load 200"	13	load 100"	Th. 150"
G3	load 200"	14	load 200"	Th. 100"
G4	load 100"	15	load 100"	Th. 100"
G5	load 100"	16	load 100"	Th. 100"
G6	load 200"	17	load 200"	Th. 100"

未注公差 UNLESS OTHERWISE SPECIFIED TOLERANCE		品名 (TITLE):	
线性 (LINER)	X ± --	角度 (ANGLES)	X' ± ± 1'
	.X ± 0.20		.X' ± ± --
	.XX ± 0.15		.XX' ± ± --
	.XXX ± 0.10		.XXX' ± ± --
第三视角投影 THIRD ANGLE PROJECTION		审核 (CHECK)	
		日期 (DATE)	
FH2.0*4.3 2*NP SMT 带柱 系列图		料号 (PART NO.):	22220-XX143MCOX-32
A4		图号 (DWG NO.):	22220-XX143MCOX-32
GOXCONN		单位 (UNIT)	MM
GOXCONN		页数 (SHEET)	1 OF 1

